


6181-XB DOUBLE INSULATED LSZH 600/1000V

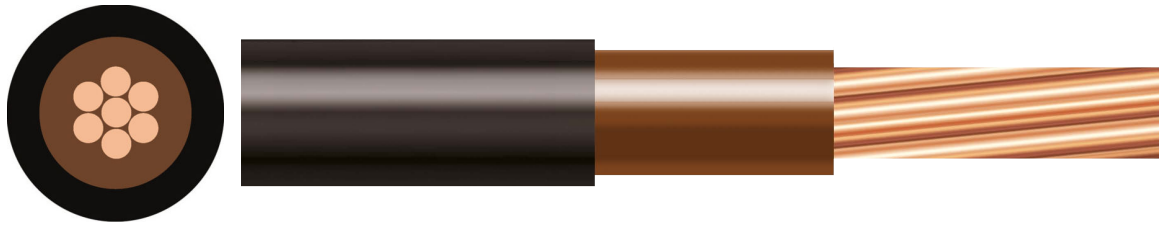

The 6181B cable is a Low Smoke Zero Halogen single-core cable designed for fixed installations, including walls, boards, and channels, offering low smoke emission and corrosion resistance in case of fire. This double-insulated cable is suitable for building wiring applications in both domestic and light industrial settings, available in Blue and Brown core options.

CONDUCTOR	Plain Copper
STRANDING	Class 2
INSULATION	XLPE
OUTERSHEATH	LSZH
OUTERSHEATH COLOUR	Black, White, Blue, Red, Brown, Yellow
RATED VOLTAGE	0.6/1kV
MINIMUM BENDING RADIUS	Diameter up to 25mm: 4 x overall diameter Diameter over 25mm: 6 x overall diameter
OPERATING TEMPERATURE	Maximum 90°C Minimum flexing -15°C
STANDARDS	BS6724: Electric cables. Thermosetting insulated, armoured cables for voltages of 600/1000V and 1900/3300V, having low emission of smoke and corrosive gases when affected by fire BSEN50267-1 Common test methods for cables under fire conditions. Tests on gases evolved during combustion of materials from cables. Apparatus BSEN50267-2-1: Common test methods for cables under fire conditions. Tests on gases evolved during combustion of materials from cables. Procedures. Determination of the amount of halogen acid gas. Flame Propagation: Meets BS EN 60332-1-2:2004

SPECIFICATION DATA

BATT Part No Black/Black	BATT Part No Blue/Black	BATT Part No Brown/Black	Size sqmm	Diameter over conductor mm	Radial thickness of insulation mm	Diameter over core mm	Approx overall diameter mm	Weight kg/km
45384	45426	45550	25	6.40	0.9	8.2	11.0	315
	45427	45551	35	7.50	0.9	9.3	12.1	420
45125	45428	45553	50	8.90	1.0	11.1	14.2	590
45126	45429	45527	70	10.70	1.1	13.2	16.4	810
45127	45430	45528	95	12.60	1.1	15.0	18.3	1060
45128	45431		120	14.98	1.2	17.6	21.2	1340
45129	45432		150	15.96	1.4	19.0	22.8	1660
45130	45433		185	17.78	1.6	21.3	25.1	2030
45131	45434	45521	240	20.52	1.7	24.3	28.4	2600
45132	45135		300	22.86	1.8	26.8	31.0	3210
45133	45436		400	25.74	2.0	30.1	34.8	4240
45134	45437		500	28.80	2.2	34.8	38.5	5260
45135	45438		63.0	33.02	2.4	38.5	43.4	6600

RATING TABLES

TABLE 4E1A – Single-core 90 °C thermosetting insulated cables, non-armoured, with or without sheath (COPPER CONDUCTORS)

CURRENT-CARRYING CAPACITY (amperes): Ambient temperature: 30 °C
Conductor operating temperature: 90 °C

Conductor cross-sectional area (mm ²)	Reference Method A (enclosed in conduit in thermally insulating wall etc.)		Reference Method B (enclosed in conduit on a wall or in trunking etc.)		Reference Method C (clipped direct)		Reference Method F (in free air or on a perforated cable tray etc horizontal or vertical etc) Touching			Reference Method G (in free air) Spaced by one cable diameter	
	2 cables, single-phase AC or DC	3 or 4 cables, three-phase AC	2 cables, single-phase AC or DC	3 or 4 cables, three-phase AC	2 cables, single-phase AC or DC flat and touching	3 or 4 cables, three-phase AC flat and touching or trefoil	2 cables, single-phase AC or DC flat	3 cables, three-phase AC flat	3 cables, three-phase AC trefoil	2 cables, single-phase AC or DC or 3 cables three-phase AC flat	
	2	3	4	5	6	7	8	9	10	Horizontal	Vertical
1	(A)	(A)	(A)	(A)	(A)	(A)	(A)	(A)	(A)	(A)	(A)
1.5	14	13	17	15	19	17.5	-	-	-	-	-
2.5	19	17	23	20	25	23	-	-	-	-	-
4	26	23	31	28	34	31	-	-	-	-	-
6	35	31	42	37	46	41	-	-	-	-	-
10	45	40	54	48	59	54	-	-	-	-	-
16	61	54	75	66	81	74	-	-	-	-	-
25	81	73	100	88	109	99	-	-	-	-	-
35	106	95	133	117	143	130	161	141	135	182	161
50	131	117	164	144	176	161	200	176	169	226	201
70	158	141	198	175	228	209	242	216	207	275	246
95	200	179	253	222	293	268	310	279	268	353	318
120	241	216	306	269	355	326	377	342	328	430	389
150	278	249	354	312	413	379	437	400	383	500	454
185	318	285	393	342	476	436	504	464	444	577	527
240	362	324	449	384	545	500	575	533	510	661	605
300	424	380	528	450	644	590	679	634	607	781	719
400	486	435	603	514	743	681	783	736	703	902	833
500	-	-	683	584	868	793	940	868	823	1085	1008
630	-	-	783	666	990	904	1083	998	946	1253	1169
800	-	-	900	764	1130	1033	1254	1151	1088	1454	1362
1000	-	-	-	-	1288	1179	1358	1275	1214	1581	1485
1000	-	-	-	-	1443	1323	1520	1436	1349	1775	1671

COPPER CONDUCTORS

- NOTES:
- Where it is intended to connect the cables in this table to equipment or accessories designed to operate at a temperature lower than the maximum operating temperature of the cable, the cables should be rated at the maximum operating temperature of the equipment or accessory (see Regulation 512.1.5).
 - Where it is intended to group a cable in this table with other cables, the cable should be rated at the lowest of the maximum operating temperatures of any of the cables in the group (see Regulation 512.1.5).
 - For cables having flexible conductors see section 2.4 of this appendix for adjustment factors for current-carrying capacity and voltage drop.

TABLE 4E1B

VOLTAGE DROP (per ampere per metre):

Conductor operating temperature: 90°C

Conductor cross-sectional area	2 cables, DC	2 cables, single-phase AC				Reference Methods A & B (enclosed in conduit or trunking)	3 or 4 cables, three-phase AC															
		Reference Methods A & B (enclosed in conduit or trunking)		References Methods C, F & G (clipped direct, on tray or in free air)			Reference Methods A & B (enclosed in conduit or trunking)	Reference Methods C, F & G (clipped direct, on tray or in free air)														
				Cables touching	Cables spaced*			Cables touching, Trefoil	Cables touching, Flat	Cables spaced*, Flat												
1	2	3		4	5	6	7			8			9									
(mm ²)	(mV/A/m)	(mV/A/m)		(mV/A/m)	(mV/A/m)	(mV/A/m)	(mV/A/m)			(mV/A/m)			(mV/A/m)									
1	46	46		46	46	40	40			40			40									
1.5	31	31		31	31	27	27			27			27									
2.5	19	19		19	19	16	16			16			16									
4	12	12		12	12	10	10			10			10									
6	7.9	7.9		7.9	7.9	6.8	6.8			6.8			6.8									
10	4.7	4.7		4.7	4.7	4.0	4.0			4.0			4.0									
16	2.9	2.9		2.9	2.9	2.5	2.5			2.5			2.5									
25	1.85	r	x	z	r	x	z	r	x	z	r	x	z	r	x	z	r	x	z			
35	1.35	1.85	0.31	1.90	1.85	0.190	1.85	1.85	0.28	1.85	1.60	0.27	1.65	1.60	0.165	1.60	1.60	0.190	1.60	1.60	0.27	1.65
50	0.99	1.35	0.29	1.35	1.35	0.180	1.35	1.35	0.27	1.35	1.15	0.25	1.15	1.15	0.155	1.15	1.15	0.180	1.15	1.15	0.26	1.20
70	0.68	1.00	0.29	1.05	0.99	0.180	1.00	0.99	0.27	1.00	0.87	0.25	0.90	0.86	0.155	0.87	0.86	0.180	0.87	0.86	0.26	0.89
95	0.49	0.70	0.28	0.75	0.68	0.175	0.71	0.68	0.26	0.73	0.60	0.24	0.65	0.59	0.150	0.61	0.59	0.175	0.62	0.59	0.25	0.65
120	0.39	0.51	0.27	0.58	0.49	0.170	0.52	0.49	0.26	0.56	0.44	0.23	0.50	0.43	0.145	0.45	0.43	0.170	0.46	0.43	0.25	0.49
150	0.32	0.41	0.26	0.48	0.39	0.165	0.43	0.39	0.25	0.47	0.35	0.23	0.42	0.34	0.140	0.37	0.34	0.165	0.38	0.34	0.24	0.42
185	0.25	0.33	0.26	0.43	0.32	0.165	0.36	0.32	0.25	0.41	0.29	0.23	0.37	0.28	0.140	0.31	0.28	0.165	0.32	0.28	0.24	0.37
240	0.25	0.27	0.26	0.37	0.26	0.165	0.30	0.25	0.25	0.36	0.23	0.23	0.32	0.22	0.140	0.26	0.22	0.165	0.28	0.22	0.24	0.33
300	0.190	0.21	0.26	0.33	0.20	0.160	0.25	0.195	0.25	0.31	0.185	0.22	0.29	0.170	0.140	0.22	0.170	0.165	0.24	0.170	0.24	0.29
400	0.155	0.175	0.25	0.31	0.160	0.160	0.22	0.155	0.25	0.29	0.150	0.22	0.27	0.140	0.140	0.195	0.135	0.160	0.21	0.135	0.24	0.27
400	0.120	0.140	0.25	0.29	0.130	0.155	0.20	0.125	0.24	0.27	0.125	0.22	0.25	0.110	0.135	0.175	0.110	0.160	0.195	0.110	0.24	0.26
500	0.093	0.120	0.25	0.28	0.105	0.155	0.185	0.098	0.24	0.26	0.100	0.22	0.24	0.090	0.135	0.160	0.088	0.160	0.180	0.085	0.24	0.25
630	0.072	0.100	0.25	0.27	0.086	0.155	0.175	0.078	0.24	0.25	0.088	0.21	0.23	0.074	0.135	0.150	0.071	0.160	0.170	0.068	0.23	0.24
800	0.056	-	-	-	0.072	0.150	0.170	0.064	0.24	0.25	-	-	-	0.062	0.130	0.145	0.059	0.155	0.165	0.055	0.23	0.24
1000	0.045	-	-	-	0.063	0.150	0.165	0.054	0.24	0.24	-	-	-	0.055	0.130	0.140	0.050	0.155	0.165	0.047	0.23	0.24

NOTE: * Spacings larger than one cable diameter will result in a larger voltage drop.

The information in this datasheet is for guidance only and subject to change without liability. Images provided are representations; actual cable dimensions may vary due to manufacturing tolerances.

www.battcables.com | 01322 441165

©2024 Batt Cables Limited

