

A2 BRASS ECONOMY GLANDS

A2 brass glands for use indoors and outdoors with all types of unarmoured cable (also braid armoured cables if terminated inside an enclosure) where it is essential to prove an IP66 seal on the outer sheath.

Standards:

- BS6121: Part 1: 2005. BSEN50252

Kit contents:


- Gland with Neoprene/Nylon Ring Gasket
- Locknut
- Earth Tag
- PVC Shroud

Additional Accessories available (upon request):

- Nylon Washers
- Fibre Washers
- Serrated Washers

SPECIFICATION DATA

Batt Part No.	Gland Size	Metric Thread	Min. Thread Length (mm)	Cable Diameter (mm) "B"		Max Across Corners (mm)
		"C"	"D"	Min	Max	"E"
88780	20s/16mm	M20	10	3.1	8.6	24.4
88850	20s	M20	10	6.1	11.6	26.5
88851	20mm	M20	10	6.5	13.9	30.0
88852	25mm	M25	10	11.1	19.9	39.9
88853	32mm	M32	10	17.0	26.2	45.5
88854	40mm	M40	15	22.0	32.1	55.4
88856	50s	M50	15	29.5	38.1	61.0
88855	50mm	M50	15	35.6	44.0	66.5
84239	63s	M63	15	40.1	49.9	77.6
84240	63mm	M63	15	47.2	55.9	83.2
84241	75s	M75	15	52.8	61.9	94.2
84242	75mm	M75	15	59.1	67.9	94.2

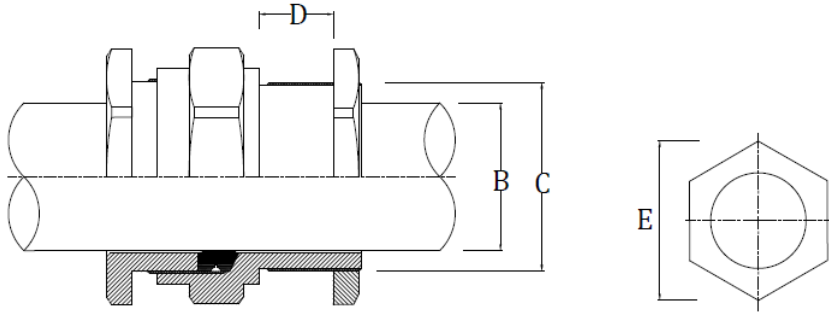

The information in this datasheet is for guidance only and subject to change without liability. Images provided are representations; actual cable dimensions may vary due to manufacturing tolerances.

www.battcables.com | 01322 441165

©2024 Batt Cables Limited

