

A2 GLANDS

CMP A2 brass glands for all types of unarmoured (and braid armoured cables when terminated inside an enclosure).

Features:

- Single Seal Industrial Cable Gland
- Robust, heavy duty design
- Displacement type seal
- Deluge protected
- Temperature range of -60°C to +130°C

Kit Contents:


- Brass Gland
- Galvanised Locknut
- PVC Shroud

Additional Accessories available (upon request):

- Locknuts
- Earth Tags
- Nylon Washers
- Fibre Washers
- Serrated Washers

SPECIFICATION DATA

Batt Part No.	CMP Pack Reference	Gland Size	Thread	Thread Length (mm)	Cable Diameter Range (mm) "A"		Gland Weight
			"C"	"E"	Min	Max	(Kgs)
88347	20S16A22RB	20s/16mm	M20	10	3.2	8.7	0.070
88348	20SA22RB	20s	M20	10	6.1	11.7	0.060
88360	20A22RB	20mm	M20	10	6.5	14.0	0.070
88362	25A22RB	25mm	M25	10	11.1	20.0	0.130
88363	32A22RB	32mm	M32	10	17.0	26.3	0.150
88364	40A22RB	40mm	M40	15	23.5	32.2	0.200
88365	50SA22RB	50s	M50	15	31.0	38.2	0.260
88285	50A22RB	50mm	M50	15	35.6	44.0	0.270
88366	63SA22RB	63s	M63	15	41.5	49.9	0.430
88367	63A22RB	63mm	M63	15	47.2	55.9	0.460
88368	75SA22RB	75s	M75	15	54.0	61.9	0.520
88369	75A22RB	75mm	M75	15	61.1	67.9	0.500
88115	90A21RA	90mm	M90	24	66.6	79.9	1.600

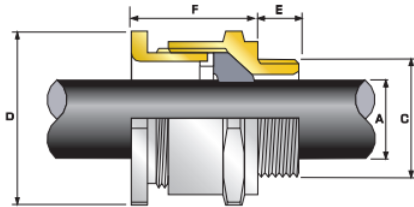

The information in this datasheet is for guidance only and subject to change without liability. Images provided are representations; actual cable dimensions may vary due to manufacturing tolerances.

www.battcables.com | 01322 441165

©2024 Batt Cables Limited

