

A2 SOLO GLANDS

CMP A2 SOLO brass glands for all types of unarmoured (and braid armoured cables when terminated inside an enclosure).

Features:

- Single Seal Industrial Cable Gland
- Robust, heavy duty design
- Displacement type seal
- Designed to prevent Coldflow
- Deluge protected
- Temperature range of -60°C to +130°C
- LUL (London Underground) approved

Kit Contents:


- Brass Gland
- Galvanised Locknut
- LSF Shroud

Additional Accessories available (upon request):

- Locknuts
- Earth Tags
- Nylon Washers
- Fibre Washers
- Serrated Washers

SPECIFICATION DATA

Batt Part No.	CMP Pack Reference	Gland Size	Thread	Thread Length (mm)	Cable Diameter Range (mm) "A"		Gland Weight
			"C"	"E"	Min	Max	(Kgs)
88323	20S16A2LSF2RA	20s/16mm	M20	10.0	3.2	8.7	0.07
88662	20SA2LSF2RA	20s	M20	10.0	6.1	11.7	0.06
88663	20A2LSF2RA	20mm	M20	10.0	6.5	14.0	0.07
88756	25A2LSF2RA	25mm	M25	10.0	11.1	20.0	0.13
88757	32A2LSF2RA	32mm	M32	10.0	17.0	26.3	0.15
88666	40A2LSF2RA	40mm	M40	15.0	23.5	32.2	0.20
88667	50SA2LSF2RA	50s	M50	15.0	31.0	38.2	0.26
88668	50A2LSF2RA	50mm	M50	15.0	35.6	44.0	0.27
88669	63SA2LSF2RA	63s	M63	15.0	41.5	49.9	0.43
88670	63A2LSF2RA	63mm	M63	15.0	47.2	55.9	0.46
88671	75A2LSF2RA	75s	M75	15.0	54.0	61.9	0.52
88672	75A2LSF2RA	75mm	M75	15.0	61.1	67.9	0.50

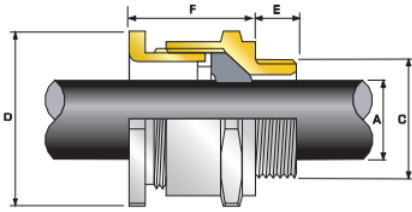

The information in this datasheet is for guidance only and subject to change without liability. Images provided are representations; actual cable dimensions may vary due to manufacturing tolerances.

www.battcables.com | 01322 441165

©2024 Batt Cables Limited

