

A2F GLANDS

CMP A2F globally approved explosive atmosphere glands for all types of unarmoured cables (and braid armour if terminated inside an enclosure). Available in Brass and Nickel Plated Brass material (stainless steel also available upon request). Also available in packs or as a gland only.

Features:

- Displacement type flameproof seal
- Deluge protected
- -60°C to +130°C
- Globally marked, IECEX, ATEX & CSA

Kit Contents:


- Gland
- Locknut
- Nylon Washer
- PVC Shroud

Additional Accessories available (upon request):

- Locknuts
- Earth Tags
- Nylon Washers
- Fibre Washers
- Serrated Washers
- LSF Shrouds

SPECIFICATION DATA

Brass Material			Nickel Plated Brass Material			Gland Size	Thread	Thread Length	Cable Diameter Range (mm) "A"		Weight (Kgs)
Batt Part No.		CMP Reference	Batt Part No.		CMP Reference				"C"	"E"	
Gland Pack	Gland Only		Gland Pack	Gland Only		Gland Pack	Gland Only				
-	-	16A2F1RA	-	-	16A2F1RA5	16mm	M16	15.0	3.2	8.7	0.06
88516	-	20S16A2F1RA	84191	84372	20S16A2F1RA5	20s/16mm	M20	15.0	3.2	8.7	0.07
-	-	20S16A2F1RA031	-	84081	20S16A2F1RA531	20s/16mm	1/2" NPT	19.9	3.2	8.7	0.07
88515	84519	20SA2F1RA	84190	84255	20SA2F1RA5	20s	M20	15.0	6.1	11.7	0.07
-	-	20SA2F1RA031	-	84082	20SA2F1RA531	20s	1/2" NPT	19.9	6.1	11.7	0.07
88514	84520	20A2F1RA	84424	84116	20A2F1RA5	20mm	M20	15.0	6.5	14.0	0.07
-	-	20A2F1RA031	84206	84083	20A2F1RA531	20mm	1/2" NPT	19.9	6.5	14.0	0.07
88518	84521	25A2F1RA	84425	84251	25A2F1RA5	25mm	M25	15.0	11.1	20.0	0.13
-	-	25A2F1RA032	84528	84510	25A2F1RA532	25mm	3/4" NPT	20.2	11.1	20.0	0.13
88519	84522	32A2F1RA	84165	84106	32A2F1RA5	32mm	M32	15.0	17.0	26.3	0.15
-	-	32A2F1RA033	-	84091	32A2F1RA533	32mm	1" NPT	25.0	17.0	26.3	0.15
88520	-	40A2F1RA	84167	84117	40A2F1RA5	40mm	M40	15.0	23.5	32.2	0.20
-	-	40A2F1RA034	-	84092	40A2F1RA534	40mm	1 1/4" NPT	25.6	23.5	32.2	0.20
88521	-	50SA2F1RA	-	-	50SA2F1RA5	50s	M50	15.0	31.0	38.2	0.26
-	-	50SA2F1RA035	-	-	50SA2F1RA535	50s	1 1/2" NPT	26.1	31.0	38.2	0.26
88522	-	50A2F1RA	84169	-	50A2F1RA5	50mm	M50	15.0	35.6	44.0	0.27
-	-	50A2F1RA036	-	-	50A2F1RA536	50mm	2" NPT	26.9	35.6	44.0	0.27
88523	-	63SA2F1RA	-	-	63SA2F1RA5	63s	M63	15.0	41.5	49.9	0.43
-	-	63SA2F1RA036	-	-	63SA2F1RA536	63s	2" NPT	26.9	41.5	49.9	0.43
88524	-	63A2F1RA	-	-	63A2F1RA5	63mm	M63	15.0	47.2	55.9	0.40
-	-	63A2F1RA037	-	-	63A2F1RA537	63mm	2 1/2" NPT	39.9	47.2	55.9	0.40
88525	-	75SA2F1RA	-	-	75SA2F1RA5	75s	M75	15.0	54.0	61.9	0.52
-	-	75SA2F1RA037	-	-	75SA2F1RA537	75s	2 1/2" NPT	39.9	54.0	61.9	0.52
-	-	75A2F1RA	-	-	75A2F1RA5	75mm	M75	15.0	61.1	67.9	0.50
-	-	75A2F1RA038	-	-	75A2F1RA538	75mm	3" NPT	41.5	61.1	67.9	0.50

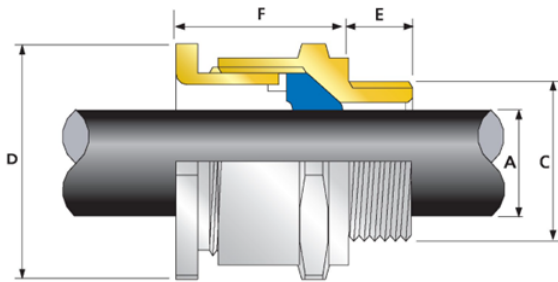

The information in this datasheet is for guidance only and subject to change without liability. Images provided are representations; actual cable dimensions may vary due to manufacturing tolerances.

www.battcables.com | 01322 441165

©2024 Batt Cables Limited

