
ALUMINIUM SINGLE BOLT TREFOIL CLEATS

Single bolt aluminium alloy trefoil cleats.

Features:


- Hinged side for easy cable installation.
- Can withstand short circuit currents of up to 30kA.
- Supplied complete with top bolt.

SPECIFICATION DATA

Batt Part No.	Cleat Reference	Cable Diameter (mm)		Cleat Dimensions (mm)			Weight (g)
		Min	Max	B	D	C	
-	376AC01	24	25	94	38	75	234
90401	376AC02	25	27	97	38	75	241
90217	376AC03	27	28	100	38	75	248
90220	376AC04	28	30	103	38	76	255
90373	376AC05	30	32	105	38	79	269
90221	376AC06	32	34	106	38	83	284
90374	376AC07	34	35	109	38	86	291
90229	376AC08	35	36	113	38	89	298
90375	376AC09	36	38	116	38	92	305
90400	376AC10	38	40	119	38	95	312
90232	376AC11	40	41	122	38	99	319
90376	376AC12	41	43	124	38	105	326
90405	376AC13	43	44	127	38	108	340
90233	376AC14	44	46	130	38	112	354
90399	376AC15	46	48	133	38	114	361
90234	376AC16	48	49	137	38	118	369
90377	376AC17	49	51	140	38	121	376
90406	376AC18	51	53	143	38	124	383
90336	376AC19	53	54	146	38	127	390
90235	376AC20	54	55.5	155	44	133	503
90407	376AC21	55.5	57	158	44	137	517
90408	376AC22	57	59	160	44	141	532
90409	376AC23	59	60	163	44	145	546
90236	376AC24	60	62	165	44	152	552

Method of Fixing:

- M10 hexagonal head set screws are recommended (can be requested on demand).
- When fixing to tray work, it is recommended that the cleats are fixed through the tray to supporting steelwork.

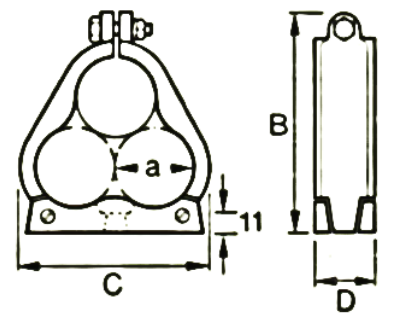

The information in this datasheet is for guidance only and subject to change without liability. Images provided are representations; actual cable dimensions may vary due to manufacturing tolerances.

www.battcables.com | 01322 441165

©2024 Batt Cables Limited

