


BARE COPPER CABLE HARD DRAWN BS7884

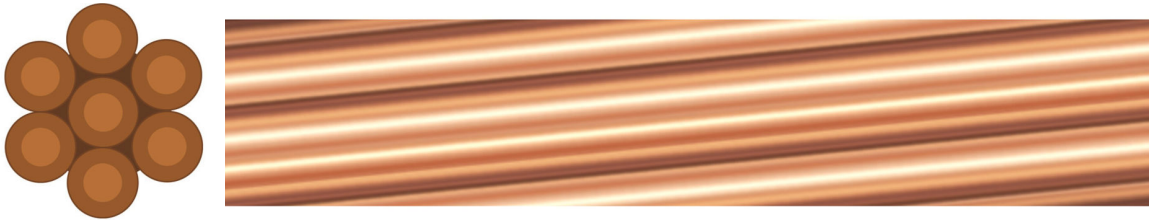

Hard Drawn Bare Copper serve as essential components in earthing electrical systems and power distribution networks. Meeting the BS7884 standards for hard-drawn copper earthing conductors, they find utility across diverse applications, including overhead electrical distribution lines, grounding electrical substations, and electrical test equipment.

CONDUCTOR	Plain Copper
STRANDING	Class 2
STANDARDS	BS7884:1997

SPECIFICATION DATA

BATT Part No	Nominal cross sectional area of conductor	Approx overall diameter	Weight
16960	16	5.1	142
16986	50	9	444
16258	70	10.7	623
16968	95	12.6	850

The information in this datasheet is for guidance only and subject to change without liability. Images provided are representations; actual cable dimensions may vary due to manufacturing tolerances.

www.battcables.com | 01322 441165

©2024 Batt Cables Limited

