


BARE COPPER CABLE SOFT DRAWN BSEN 60228

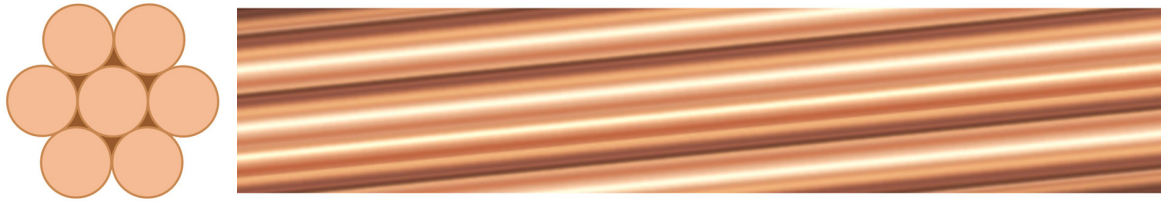

Bare copper cable designed for earthing electrical systems and power distribution networks. Constructed with soft annealed, uncoated copper strands, it meets BSEN 60228 standards. Ideal for use in grounding systems, overhead transmission, and distribution applications

CONDUCTOR	Plain Copper
STRANDING	Class 2
CORE IDENTIFICATION	1 core: Bare
STANDARDS	BSEN60228

SPECIFICATION DATA

BATT Part No	Nominal cross sectional area of conductor	Approx overall diameter	Weight
16447	6	3.1	54
16851	10	4	90
16793	16	5.1	154
16794	25	6.3	214
16795	35	7.5	297
16265	50	8.9	450
16245	70	10.7	623
16428	95	12.6	850
16463	120	13.1	1080
16654	150	14.5	1268
16370	185	17.6	1660
16827	240	20	2070
16996	300	22.3	2620

The information in this datasheet is for guidance only and subject to change without liability. Images provided are representations; actual cable dimensions may vary due to manufacturing tolerances.

www.battcables.com | 01322 441165

©2024 Batt Cables Limited

