


## BELDEN ALTERNATIVE - 82 RANGE

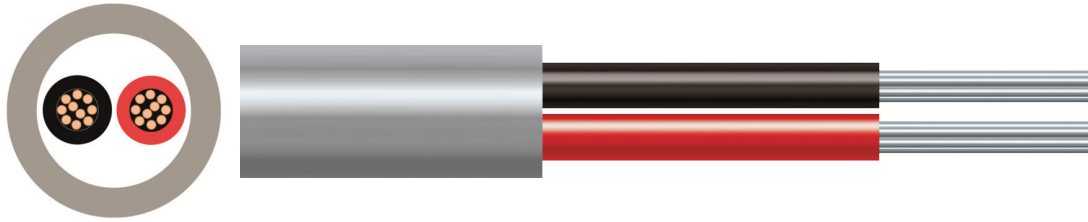

Belden Alternative power cables serve as the foundation for industrial setups, facilitating signal and power transmission within cable trays and enclosures. These cables adhere to rigorous standards, ensuring high-speed and high-quality end-to-end data transmission across various communication technology applications. They cover a wide range of industries including automation & process control, power generation, and data centres. With a focus on meeting Electronic Industries Alliance (EIA) standards, Belden equivalent cables are engineered to support high-speed data transmission, offering scalability to accommodate different project sizes. Reliable data transmission is crucial for businesses, underscoring the importance of installing top-quality cables for seamless operations.

<b>CONDUCTOR</b>	Tinned Copper
<b>STRANDING</b>	Class 2
<b>INSULATION</b>	PVC
<b>OUTERSHEATH</b>	PVC
<b>OUTERSHEATH COLOUR</b>	Grey
<b>RATED VOLTAGE</b>	300V
<b>CORE IDENTIFICATION</b>	Pair 1: Black, Red
<b>OPERATING TEMPERATURE</b>	Fixed: -20°C to +70°C

# SPECIFICATION DATA

BATT Part No	Belden Reference	No. of Pairs	AWG No. of strands	Approx overall diameter	Weight
91218	8205	1	20 AWG	4.6	24

The information in this datasheet is for guidance only and subject to change without liability. Images provided are representations; actual cable dimensions may vary due to manufacturing tolerances.

[www.battcables.com](http://www.battcables.com) | 01322 441165

©2024 Batt Cables Limited

