

BW SOLO GLANDS

CMP BW SOLO brass glands for all types of steel wire armoured cables installed indoors.

Features:

- High quality durable materials
- Simple, effective two part arrangement
- Direct & remote installation
- Permanently crimped, low impedance earth termination
- Secure against self-loosening
- -60°C to +200°C
- Superior EMC performance
- LUL (London Underground) approved

Kit Contents:


- Brass Gland
- Galvanised Locknut
- Earth Tag
- LSF Shroud

Additional Accessories available (upon request):

- Locknuts
- Earth Tags
- Nylon Washers
- Fibre Washers
- Serrated Washers

SPECIFICATION DATA

Batt Part No.	CMP Pack Reference	Gland Size	Thread	Thread Length (mm)	Cable Bedding Diameter "A"	Cable Diameter Range (mm) "B"	Armour Range (mm)		Weight (Kgs)
			"C"	"E"	Max	Max	Min	Max	
88650	20SBWLSF2RA	20s	M20	10.0	11.7	15.8	0.8	1.25	0.05
88651	20BWLSF2RA	20mm	M20	10.0	14.0	21.1	0.8	1.25	0.09
88652	25BWLSF2RA	25mm	M25	10.0	20.0	27.2	1.25	1.6	0.11
88653	32BWLSF2RA	32mm	M32	10.0	26.3	34.1	1.6	2.0	0.15
88654	40BWLSF2RA	40mm	M40	15.0	32.2	42.4	1.6	2.0	0.32
88655	50SBWLSF2RA	50s	M50	15.0	38.2	50.1	2.0	2.5	0.47
88656	50BWLSF2RA	50mm	M50	15.0	44.1	55.7	2.0	2.5	0.48
88657	63SBWLSF2RA	63s	M63	15.0	50.0	62.4	2.0	2.5	0.63
88658	63BWLSF2RA	63mm	M63	15.0	56.0	68.2	2.0	2.5	0.89
88659	75SBWLSF2RA	75s	M75	15.0	62.0	76.8	2.0	2.5	1.27
88660	75BWLSF2RA	75mm	M75	15.0	68.0	82.9	2.5	3.0	1.40

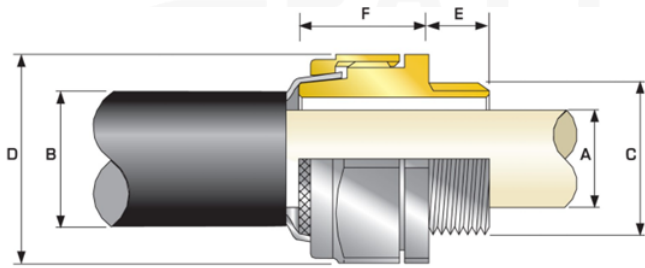

The information in this datasheet is for guidance only and subject to change without liability. Images provided are representations; actual cable dimensions may vary due to manufacturing tolerances.

sales@battcables.com | www.batt.co.uk | 01322 441165

©2024 Batt Cables Limited

