


CAT 5E UTP/LSZH CABLE

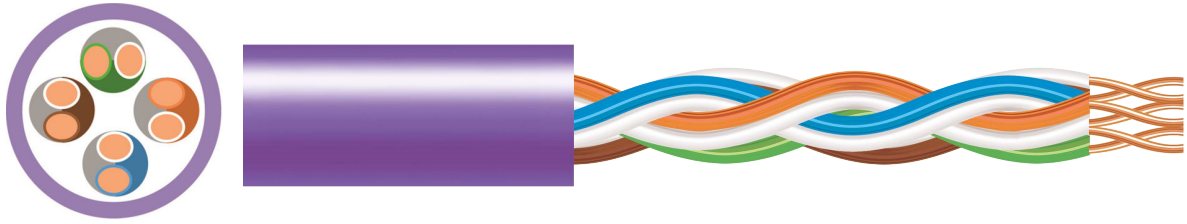

This is a high-performance 4-pair cable featuring twisted pair conductors primarily used for data transmission. Category 5E is engineered to support a frequency range of up to 100MHz, enabling transmission speeds of up to 1 gigabit per second (Gigabit Ethernet).

CONDUCTOR	Plain Copper
STRANDING	Class 1
INSULATION	PE
OUTERSHEATH	LSZH
OUTERSHEATH COLOUR	Grey, Violet, Orange
SHIELD	UTP
CORE IDENTIFICATION	Pair 1: Blue, Blue/White Pair 2: Orange, White/Orange Pair 3: Green/ White/Green Pair 4: Brown, White/Brown
MINIMUM BENDING RADIUS	Overall Bending Radius 4x
OPERATING TEMPERATURE	60°C
STANDARDS	ISO.IEC, TIA 568C.2, YD/T1019 Flame Retardant according to BS EN/IEC 60332-1-2

SPECIFICATION DATA

ELECTRICAL CHARACTERISTICS

Impedance (1-100MHz) ohms	Maximum Resistance of conductor at 20°C ohms/km	Maximum Resistance unbalance %
100±15	95	5

PERFORMANCE CHARACTERISTICS

Frequency	Attenuation dB/100m	Next	Ps-Next dB	RL dB	Elfext dB	Ps-Elfext dB/100m	Phase Delay
1	2	65.3	62.3	20	63.8	60.8	570
4	4.1	56.3	53.3	23	51.8	48.8	552
8	5.8	51.8	48.8	24.5	45.7	42.	546.73
10	6.5	50.3	47.3	25	43.8	40.8	545.38
16	8.	47.2	44.4	25	39.7	36.7	543
20	9.3	45.8	42.8	25	37.8	34.8	542.05
25	10.4	44.3	41.3	24.3	35.8	32.8	541.2
31.25	11.7	42.9	39.9	23.6	33.9	30.9	540.44
62.5	17	38.4	35.4	21.5	27.9	24.9	538.55
100	22	35.3	32.3	20.1	23.8	20.8	537.6

DIMENSIONS

BATT Part No	NO. of pairs (24 AWG)	Nominal Diameter over insulation	Approx overall diameter	Weight
54194	4		5	33

The information in this datasheet is for guidance only and subject to change without liability. Images provided are representations; actual cable dimensions may vary due to manufacturing tolerances.

www.battcables.com | 01322 441165

©2024 Batt Cables Limited

