

## CW SOLO GLANDS

CMP CW SOLO glands for use with all types of steel and aluminium wire armoured cables (suitable for indoor and outdoor use). Available in both Brass and Aluminium materials.

### Features:

- High quality durable materials
- Robust, heavy duty design
- Metal-to-metal armour clamping
- Direct & remote installation
- Controlled outer 'load retention' seal
- Unique OSTG prevents overtightening
- -60°C to +130°C (standard), -20°C to 200°C (Thermln option CWHT)
- Deluge protection option
- EMC tested
- LUL (London Underground) approved

### Kit Contents:


- Gland
- Locknut
- Earth Tag
- LSF Shroud

### Additional Accessories available (upon request):

- Locknuts
- Earth Tags
- Nylon Washers
- Fibre Washers
- Serrated Washers

# SPECIFICATION DATA

Brass Material		Aluminium Material		Gland Size	Thread	Thread Length	Cable Diameter Range (mm) "B"		Armour Range		Weight
Batt Part No.	CMP Pack Reference	Batt Part No.	CMP Pack Reference		"C"	"E"	Min	Max	Min	Max	(Kgs)
88673	20S16CWLSF2RA	-	20S16CWLSF2RA1	20s/16mm	M20	10.0	6.1	13.1	0.8	1.25	0.10
88674	20SCWLSF2RA	-	20SCWLSF2RA1	20s	M20	10.0	9.5	15.9	0.8	1.25	0.14
88675	20CWLSF2RA	-	20CWLSF2RA1	20mm	M20	10.0	12.5	20.9	0.8	1.25	0.18
-	25SCWLSF2RA	-	25SCWLSF2RA1	25s	M25	10.0	14.0	22.0	1.25	1.6	0.26
88752	25CWLSF2RA	-	25CWLSF2RA1	25mm	M25	10.0	18.2	26.2	1.25	1.6	0.26
88677	32CWLSF2RA	-	32CWLSF2RA1	32mm	M32	10.0	23.7	33.9	1.6	2.0	0.38
88678	40CWLSF2RA	-	40CWLSF2RA1	40mm	M40	15.0	27.9	40.4	1.6	2.0	0.63
88679	50SCWLSF2RA	-	50SCWLSF2RA1	50s	M50	15.0	35.2	46.7	2.0	2.5	0.76
88680	50CWLSF2RA	-	50CWLSF2RA1	50mm	M50	15.0	40.4	53.0	2.0	2.5	0.87
88681	63SCWLSF2RA	-	63SCWLSF2RA1	63s	M63	15.0	45.6	59.4	2.0	2.5	1.39
88682	63CWLSF2RA	-	63CWLSF2RA1	63mm	M63	15.0	54.6	65.8	2.0	2.5	1.39
88683	75SCWLSF2RA	-	75SCWLSF2RA1	75s	M75	15.0	59.0	72.0	2.0	2.5	2.31
88684	75CWLSF2RA	-	75CWLSF2RA1	75mm	M75	15.0	66.7	78.4	2.5	3.0	2.91

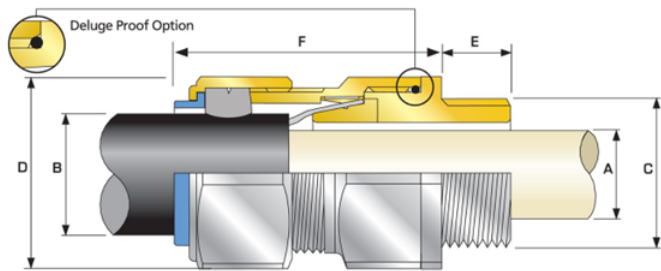

The information in this datasheet is for guidance only and subject to change without liability. Images provided are representations; actual cable dimensions may vary due to manufacturing tolerances.

[www.battcables.com](http://www.battcables.com) | 01322 441165

©2024 Batt Cables Limited

