

CX BRASS ECONOMY GLANDS

CX brass gland for use with all types of flexible wire braid cables (e.g. CY/SY). Used in indoor and outdoor applications.

Standards:

- BS6121: Part 1: 2005

Kit contents:


- Gland with Neoprene/Nylon Ring Gasket
- Locknut
- Earth Tag
- PVC Shroud

Additional Accessories available (upon request):

- Nylon Washers
- Fibre Washers
- Serrated Washers

SPECIFICATION DATA

Batt Part No.	Gland Size	Metric Thread	Min. Thread Length (mm)	Cable Diameter (mm)			Max Across Corners (mm)
		"C"	"D"	Bore "A"	Min "B"	Max "B"	"E"
84180	20s/16mm	M20	10	8.7	8.0	13.5	23
84181	20s	M20	10	11.7	11.2	16.0	23
84182	20mm	M20	10	14.0	13.2	21.0	26
84183	25mm	M25	10	20.0	15.5	24.0	33
84184	32mm	M32	10	26.3	26.4	34.0	41
84185	40mm	M40	15	32.2	31.5	40.5	50
84186	50s	M50	15	38.2	36.4	46.8	61
84187	50mm	M50	15	44.1	42.9	52.8	63
84188	63s	M63	15	50.0	46.8	60.5	84
84189	63mm	M63	15	56.0	58.4	65.5	85
-	75s	M75	15	62.0	60.0	71.8	100
-	75mm	M75	15	68.0	66.7	78.1	100

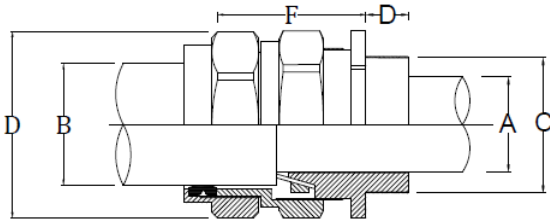

The information in this datasheet is for guidance only and subject to change without liability. Images provided are representations; actual cable dimensions may vary due to manufacturing tolerances.

www.battcables.com | 01322 441165

©2024 Batt Cables Limited

