

CX GLANDS

CMP CX industrial single seal glands for use with braid, pliable wire and steel tape armoured cables.

Features:

- High quality durable materials
- Robust, heavy duty design
- Metal-to-metal armour clamping
- Direct & remote installation
- Controlled outer 'load retention' seal
- Unique OSTG prevents overtightening
- -60°C to +130°C (standard), -200°C to 200°C (Thermin option CXHT)
- Deluge protection option
- EMC tested

Kit Contents:


- Brass Gland
- Galvanised Locknut
- Brass Earth Tag
- PVC Shroud

Additional Accessories available (upon request):

- Locknuts
- Earth Tags
- Nylon Washers
- Fibre Washers
- Serrated Washers

SPECIFICATION DATA

Batt Part No.	CMP Reference	Gland Size	Thread	Thread Length	Cable Diameter Range (mm) "B"		Armour Range		Weight
			"C"	"E"	Min	Max	Min	Max	(Kgs)
88370	20S16CX2RB	20s/16mm	M20	10.0	6.1	13.1	0.3	1.0	0.10
88371	20SCX2RB	20s	M20	10.0	9.5	15.9	0.3	1.0	0.10
88372	20CX2RB	20mm	M20	10.0	12.5	20.9	0.4	1.0	0.15
-	25SCX2RB	25s	M25	10.0	14.0	22.0	0.4	1.2	0.22
88755	25CX2RB	25mm	M25	10.0	18.2	26.2	0.4	1.2	0.22
88375	32CX2RB	32mm	M32	10.0	23.7	33.9	0.4	1.2	0.31
88376	40CX2RB	40mm	M40	15.0	27.9	40.4	0.4	1.6	0.45
88377	50CX2RB	50s	M50	15.0	35.2	46.7	0.4	1.6	0.57
88378	50CX2RB	50mm	M50	15.0	40.4	53.0	0.6	1.6	0.75
88379	63CX2RB	63s	M63	15.0	45.6	59.4	0.6	1.6	1.04
88380	63CX2RB	63mm	M63	15.0	54.6	65.8	0.6	1.6	1.02
-	75SCX2RB	75s	M75	15.0	59.0	72.0	0.6	1.6	1.79
-	75CX2RB	75mm	M75	15.0	66.7	78.4	0.6	1.6	2.09

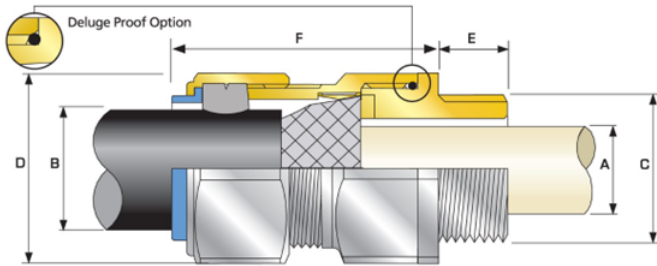

The information in this datasheet is for guidance only and subject to change without liability. Images provided are representations; actual cable dimensions may vary due to manufacturing tolerances.

www.battcables.com | 01322 441165

©2024 Batt Cables Limited

