

CXT BRASS ECONOMY GLANDS

CXT brass gland for use with all types of flexible wire braid cables (e.g. CY/SY). Used in indoor and outdoor applications.

Standards:

- BS6121: Part 1: 2005

Kit contents:


- Gland with Neoprene/Nylon Ring Gasket
- Locknut
- Earth Tag
- PVC Shroud

Additional Accessories available (upon request):

- Nylon Washers
- Fibre Washers
- Serrated Washers

SPECIFICATION DATA

Batt Part No.	Gland Size	Metric Thread	Min. Thread Length (mm)	Cable Diameter (mm) "B"		Max Across Corners (mm)
		"C"	"D"	Min	Max	"E"
88001	20s/16mm	M20	15	3.1	8.6	24.4
88905	20s	M20	15	6.1	11.6	26.5
88906	20mm	M20	15	6.5	13.9	30.0
88907	25mm	M25	15	11.1	19.9	39.9
88908	32mm	M32	15	17.0	26.2	45.5
88909	40mm	M40	15	22.0	32.1	55.4
88910	50s	M50	15	29.5	38.1	61.0
88911	50mm	M50	15	35.6	44.0	66.5

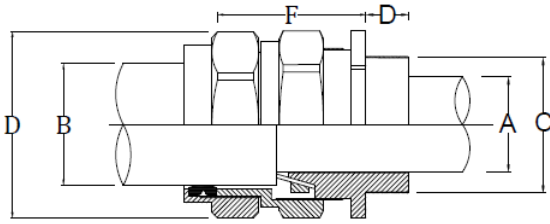

The information in this datasheet is for guidance only and subject to change without liability. Images provided are representations; actual cable dimensions may vary due to manufacturing tolerances.

www.battcables.com | 01322 441165

©2024 Batt Cables Limited

