

## E1W GLANDS

CMP E1W industrial double seal glands for use with all types of steel and aluminium wire armoured cables.

### Features:

- Metal-to-metal armour clamping
- Direct & remote installation
- Permanently crimped, low impedance earth termination
- Secure against self-loosening
- Displacement type inner seal
- Controlled outer 'load retention' seal
- Unique OSTG prevents overtightening
- Designed to prevent Coldflow
- Deluge protection option
- -60°C to +130°C
- Superior EMC performance

### Kit Contents:


- Gland
- Locknut
- Earth Tag
- PVC Shroud (*LSF SOLO versions available upon request*)

### Additional Accessories available (upon request):

- Locknuts
- Earth Tags
- Nylon Washers
- Fibre Washers
- Serrated Washers

# SPECIFICATION DATA

Batt Part No.	CMP Pack Reference	Gland Size	Thread	Thread Length	Cable Diameter Range (mm) "B"		Armour Range		Weight
			"C"	"E"	Min	Max	Min	Max	(Kgs)
88186	20S16E1W2RF	20s/16mm	M20	10.0	6.1	13.1	0.8	1.25	0.16
88079	20SE1W2RF	20s	M20	10.0	9.5	15.9	0.8	1.25	0.15
88167	20E1W2RF	20mm	M20	10.0	12.5	20.9	0.8	1.25	0.21
-	25SE1W2RF	25s	M25	10.0	14.0	22.0	1.25	1.6	0.33
88317	25E1W2RF	25mm	M25	10.0	18.2	26.2	1.25	1.6	0.33
88041	32E1W2RF	32mm	M32	10.0	23.7	33.9	1.6	2.0	0.43
88042	40E1W2RF	40mm	M40	15.0	27.9	40.4	1.6	2.0	0.62
88042	50SE1W2RF	50s	M50	15.0	35.2	46.7	2.0	2.5	0.75
88423	50E1W2RF	50mm	M50	15.0	40.4	53.0	2.0	2.5	0.95
88319	63SE1W2RF	63s	M63	15.0	45.6	59.4	2.0	2.5	1.34
-	63E1W2RF	63mm	M63	15.0	54.6	65.8	2.0	2.5	1.34
-	75SE1W2RF	75s	M75	15.0	59.0	72.0	2.0	2.5	2.11
-	75E1W2RF	75mm	M75	15.0	66.7	78.4	2.5	3.0	2.42

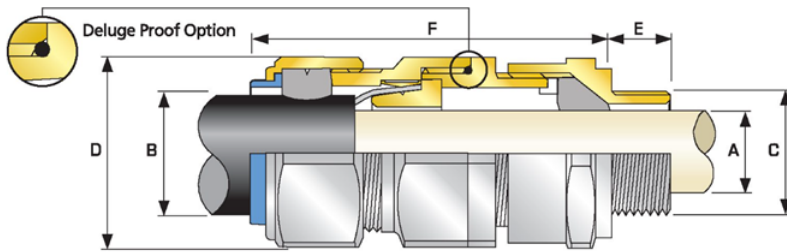

The information in this datasheet is for guidance only and subject to change without liability. Images provided are representations; actual cable dimensions may vary due to manufacturing tolerances.

[www.battcables.com](http://www.battcables.com) | 01322 441165

©2024 Batt Cables Limited

