

E2FW GLANDS

CMP E2FW globally approved explosive atmosphere glands for lead sheathed steel and aluminium wire armoured cables.

Features:

- Effectively earths / grounds lead sheathed cables
- Metal-to-metal armour clamping
- Direct & remote installation
- Displacement type flameproof inner seal
- Controlled outer 'load retention' seal
- Unique OSTG prevents overtightening
- Designed to prevent coldflow, see CMP Technical Document TS001 (available upon request)
- -60°C to +130°C
- Class I Zone 1, 21 and Zone 2, 22 Class I Division 2 ABCD
- Globally marked, IECEx, ATEX & cCSAus
- Superior EMC performance

Kit Contents:


- Gland
- Locknut
- Earth Tag
- PVC Shroud

Additional Accessories available (upon request):

- Locknuts
- Earth Tags
- Nylon Washers
- Fibre Washers
- Serrated Washers
- LSF Shrouds

SPECIFICATION DATA

Batt Part No.	CMP Reference	Gland Size	Thread	Thread Length	Cable Diameter Range (mm) "B"		Armour Range		Weight
			"C"	"E"	Min	Max	Min	Max	(Kgs)
-	20S16E2FW1RA	20s/16mm	M20	15.0	6.1	13.1	0.8	1.25	0.16
84330	20SE2FW1RA	20s	M20	15.0	9.5	15.9	0.8	1.25	0.15
88460	20E2FW1RA	20mm	M20	15.0	12.5	20.9	0.8	1.25	0.21
-	25SE2FW1RA	25s	M25	15.0	14.0	22.0	1.25	1.6	0.33
88009	25E2FW1RA	25mm	M25	15.0	18.2	26.2	1.25	1.6	0.33
88147	32E2FW1RA	32mm	M32	15.0	23.7	33.9	1.6	2.0	0.43
88150	40E2FW1RA	40mm	M40	15.0	27.9	40.4	1.6	2.0	0.62
88152	50SE2FW1RA	50s	M50	15.0	35.2	46.7	2.0	2.5	0.75
88442	50E2FW1RA	50mm	M50	15.0	40.4	53.0	2.0	2.5	0.95
88153	63SE2FW1RA	63s	M63	15.0	45.6	59.4	2.0	2.5	1.34
88157	63E2FW1RA	63mm	M63	15.0	54.6	65.8	2.0	2.5	1.34
88158	75SE2FW1RA	75s	M75	15.0	59.0	72.0	2.0	2.5	2.11
88586	75E2FW1RA	75mm	M75	15.0	66.7	78.4	2.5	3.0	2.42

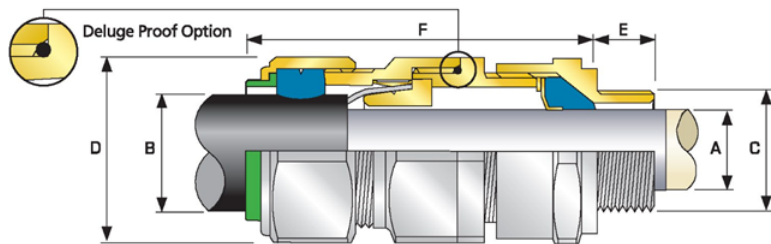

The information in this datasheet is for guidance only and subject to change without liability. Images provided are representations; actual cable dimensions may vary due to manufacturing tolerances.

www.battcables.com | 01322 441165

©2024 Batt Cables Limited

