

EARTH TAGS


CMP slip-on Earth Tags, installed between the Cable Gland and equipment, provide an earth bond connection as specified in BS6121:Part 5:1993 and comply with category B rating specified in IEC 62444. CMP Earth Tags have been independently short circuit tested to verify their suitability under specified service conditions.

Available materials:

- Brass
- Nickel Plated Brass
- Aluminium (upon request)
- Stainless Steel (upon request)

SPECIFICATION DATA

Brass		Nickel Plated Brass		Thread Diameter	Minimum Thickness	Nominal Diameter (mm)	Hole Size	Nominal Length (mm)	Nominal Centres (mm)
Batt Part No.	CMP Reference	Batt Part No.	CMP Reference	"A"	(mm)	"C"	"D"	"E"	"F"
88400	16ET	-	16ET5	M16	1.3	25.4	M6	50.4	30.2
88401	20ET	84195	20ET5	M20	1.3	27.1	M6	52.3	33.1
88402	25ET	84199	25ET5	M25	1.5	35.1	M6	59.2	35.6
88403	32ET	84224	32ET5	M32	1.5	45.2	M12	77.0	43.1
88404	40ET	84225	40ET5	M40	1.5	53.7	M13	88.7	45.4
88405	50ET	84226	50ET5	M50	1.5	65.2	M13	111.2	58.1
88406	63ET	-	63ET5	M63	1.5	82.6	M13	128.7	66.8
88407	75ET	-	75ET5	M75	1.5	95.4	M13	141.5	73.0
-	90ET	-	90ET	M90	2.0	114.2	M13	161.0	85.0

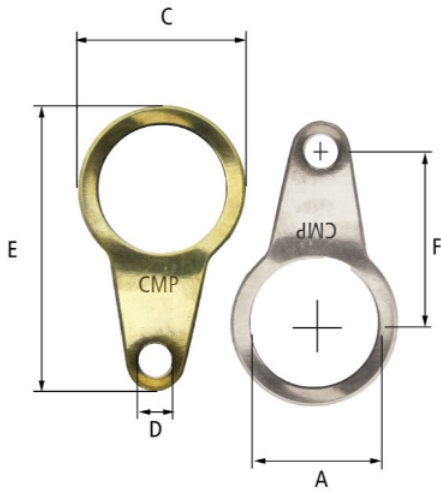

The information in this datasheet is for guidance only and subject to change without liability. Images provided are representations; actual cable dimensions may vary due to manufacturing tolerances.

www.battcables.com | 01322 441165

©2024 Batt Cables Limited

