


J-Y(ST)Y TELEPHONE CABLE

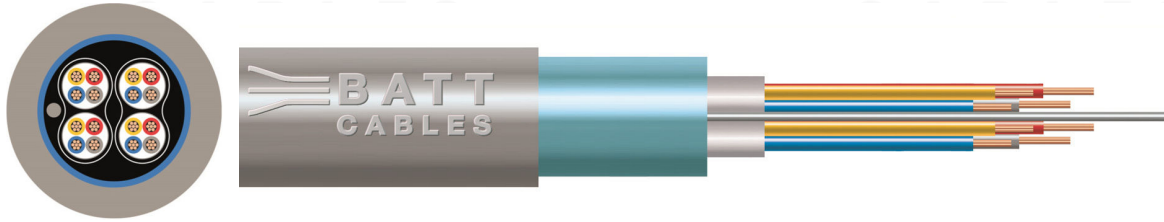

These cables are designed for telecommunications, facilitating the transmission of data and signals. Suitable for various applications including telephone, telex, modems, burglar and fire alarm systems, communication systems, access control, and data control. Ideal for fixed installation in both dry and wet interiors, including on and under plaster.

CONDUCTOR	Plain Copper
STRANDING	Class 1
INSULATION	PVC
OUTERSHEATH	PVC
OUTERSHEATH COLOUR	Grey
RATED VOLTAGE	300V
MINIMUM BENDING RADIUS	8 x overall diameter
OPERATING TEMPERATURE	Fixed: -30°C to +70°C
STANDARDS	VDE 0815
APPROVALS	

SPECIFICATION DATA

BATT Part No	No of pairs	Formation	Nominal diameter of conductors (mm)	Approx overall diameter (mm)	Weight (kg/km)
43099	2pr	2x2x0.5	0.8	7	60
40361	4pr	4x2x0.5	0.8	9	100

ELECTRICAL CHARACTERISTICS

Nominal diameter of conductors (mm)	Loop resistance (ohms/km)	Capacitance (nF/km at 800Hz)
0.8	73.2	100

The information in this datasheet is for guidance only and subject to change without liability. Images provided are representations; actual cable dimensions may vary due to manufacturing tolerances.

sales@battcables.com | www.batt.co.uk | 01322 441165

©2024 Batt Cables Limited

