


JE-H(ST)H E30-E90 COMMUNICATION CABLE 225V

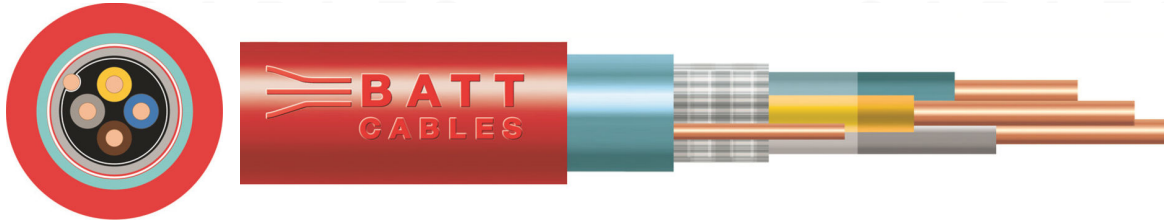

These flame-resistant, halogen-free cables with static screening are designed for telecommunications, ensuring minimal interference impulses. Suitable for fixed installations in environments prioritizing safety, such as industrial complexes, public buildings, and hospitals. Ideal for signal transmission in systems for measuring, control, data, and regulation technology, as well as for use in fire hazard areas with high concentrations of people and assets. Can be installed in both dry and wet rooms, including for fire survival cable systems according to DIN 4102 part 12.

OUTERSHEATH	LSZH
OUTERSHEATH COLOUR	Red
MINIMUM BENDING RADIUS	Overall Bending Radius 6x
STANDARDS	DIN VDE 4102 / IEC 60332

A faint, light grey watermark of the BATT CABLES logo is visible in the background.A faint, light grey watermark of the BATT CABLES logo is visible in the background.A faint, light grey watermark of the BATT CABLES logo is visible in the background.A faint, light grey watermark of the BATT CABLES logo is visible in the background.

SPECIFICATION DATA

BATT Part No	Number of Pairs	Number of Cores	Nominal Cross Section mm	Conductor Diameter mm
42263	1	2	0.5	0.8
42260	2	4	0.5	0.8
42298	4	8	0.5	0.8

The information in this datasheet is for guidance only and subject to change without liability. Images provided are representations; actual cable dimensions may vary due to manufacturing tolerances.

sales@battcables.com | www.batt.co.uk | 01322 441165

©2024 Batt Cables Limited

