

LSOH TWO BOLT CLEATS

Plastic Low Smoke Zero Halogen LUL Approved Two Bolt Cleat for larger cable diameters. Resistant to weather, sunlight and corrosive environments such as oils and most chemicals.

Features and Benefits:

- Suitable for use with cable diameters 50 to 94mm
- Manufactured from LSOH Polymer
- Designed for use with LSOH, LSZH & OHLS Cables
- Sunlight (UV) and weather resistant
- Two-piece, two fixing design
- Can be double stacked on common fixings
- Operating temperature -40°C to +60°C
- Tested in accordance with BS EN 50368
- LUL APR Product ID 1958

SPECIFICATION DATA

Batt Part No.	Cleat Reference	Cable and Cleat Selection		Cleat Details				Weight
		Cable Diameter A (mm)		Dimensions (mm)				
		Min	Max	B	C	D	E	(g)
90003	374LSF01	50	58	89	102	45	80	174
90005	374LSF02	56	64	93	102	45	80	158
90007	374LSF03	62	70	98	114	45	92	174
90018	374LSF04	68	76	104	114	50	92	210
-	374LSF05	74	82	110	126	50	104	254
-	374LSF06	80	88	118	126	50	104	264
-	374LSF07	86	94	121	136	60	114	326


Method of Fixing:

- In all applications the cleat should be mounted on suitable M10 fixings (fixing kits can be requested on demand).
- There is no need for any channel adaptor when mounting directly on to 'C' section channel.

Performance Data

Test Standard	EN 50368:2003
Type	6.1.2 Non-Metallic
Impact Resistance	6.2.5 V. Heavy
Lateral Load	1.22 -> 3.485 kN
Axial Load	82 -> 110 N
Needle Flame	>120 secs

*Technical information can be subject to change without notice.

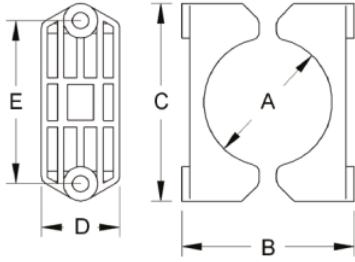

The information in this datasheet is for guidance only and subject to change without liability. Images provided are representations; actual cable dimensions may vary due to manufacturing tolerances.

www.battcables.com | 01322 441165

©2024 Batt Cables Limited

