

POLYPROPYLENE TWO BOLT CLEATS


The two part dual fixing cable cleats are manufactured from high strength polypropylene and designed to be easily stacked to save time and space.

Features:

- Fastening/fitting/routing and multiple conductor low, medium and high voltage cables.
- Excellent weathering and high resistance to ultraviolet light.
- Excellent stiffness and tensile strength.
- Underwriters Laboratories UL 94-V0
- European Standard IEC 61914:2009
- Temperature Range -40°C to +40°C
- Polypropylene material (LSZH also available)

SPECIFICATION DATA

Batt Part No.	Cleat Reference	Cable OD Range (mm)		Cleat Dimensions (mm)					Stud Hole Size
		Min	Max	A	B	C	D	E	
90417	TC8	41.0	48.0	62.0	97.0	58.0	12.0	75.0	2 x M10
90201	TC9	48.0	57.0	64.0	99.0	59.0	13.0	76.2	2 x M10
90035	TC10	57.0	64.0	70.0	104.0	59.0	15.0	76.2	2 x M10
90225	TC11	64.0	70.0	81.0	134.0	63.0	12.0	114.3	2 x M10
90022	TC12	70.0	76.0	87.0	135.0	63.0	12.0	114.3	2 x M10
90131	TC14	76.0	85.0	93.0	135.5	63.0	12.0	114.3	2 x M10

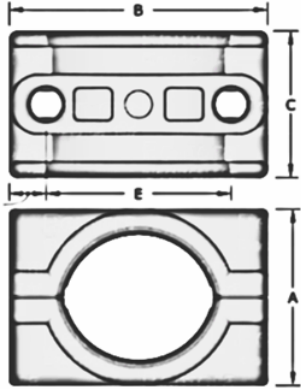

The information in this datasheet is for guidance only and subject to change without liability. Images provided are representations; actual cable dimensions may vary due to manufacturing tolerances.

www.battcables.com | 01322 441165

©2024 Batt Cables Limited

