

---


## SERRATED WASHERS

CMP stainless steel 316 graded serrated washers are fitted internally to the equipment before a locknut and act as an anti-vibration device to prevent the Cable Gland or accessory from inadvertently loosening in service.

Self-loosening should be avoided according to clause 6.4.1 of IEC 60079-14, this can occur through relative motion over time even without vibration, due to differential thermal effects caused as a result of either differences in temperature or differences in clamped materials.

# SPECIFICATION DATA

Batt Part No.	CMP Reference	Thread Diameter	Minimum Thickness	External Diameter
		"A"	(mm)	"B"
-	16SW4	M16	3.9	25.5
84197	20SW4	M20	3.9	32.5
84219	25SW4	M25	3.9	40.0
84220	32SW4	M32	3.9	43.5
84221	40SW4	M40	3.9	64.5
84222	50SW4	M50	3.9	80.0
84223	63SW4	M63	3.9	100.0
-	75SW4	M75	4.1	112.0
-	90SW4	M90	4.1	135.0

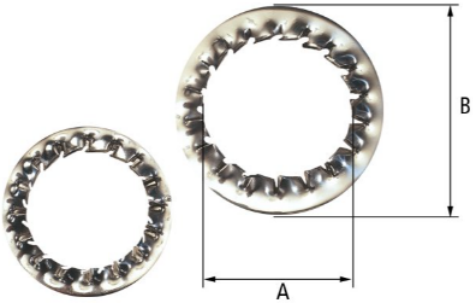

The information in this datasheet is for guidance only and subject to change without liability. Images provided are representations; actual cable dimensions may vary due to manufacturing tolerances.

[www.battcables.com](http://www.battcables.com) | 01322 441165

©2024 Batt Cables Limited

