





TYPE UX 0.6/1KV ZH MUD RESISTANT EARTH CABLE

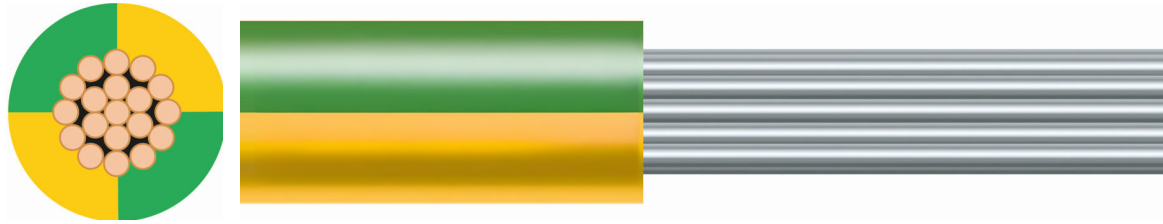

NEK606 Type UX is designed for demanding applications prioritizing safety and dependability. It's flame-retardant and halogen-free, ensuring adherence to rigorous safety standards for fixed installations in offshore settings. Engineered to endure harsh conditions including exposure to drilling mud, moisture, and oil.

CONDUCTOR	Tinned Copper
STRANDING	Class 2
OUTERSHEATH	SHF2
OUTERSHEATH COLOUR	Green/Yellow
RATED VOLTAGE	0.6/1kV
OPERATING TEMPERATURE	90 deg. C
STANDARDS	NEK 606, IEC 60092-353, IEC 60332-1, IEC 60332-3-22, IEC 60754-1, IEC 61034, CSA 22.2, EN 60079-14:2013 clause 9.3.2a
APPROVALS	  

SPECIFICATION DATA

BATT Part No	Nominal cross sectional area of conductor	Radial thickness of insulation mm2	No. of strands	Approx OD mm	Weight kg/km
10002	2.5	1	7/0.67	5.6	59
10357	4	1	7/0.85	6.2	79
10325	6	1	7/1.04	6.7	101
10335	10	1	7/1.35	7.7	150
10333	16	1	7/1.70	8.8	210
10329	25	1.2	7/2.14	10.8	330
10334	35	1.2	7/2.52	12	440
10336	50	1.4	19/1.78	13.8	580
10338	70	1.6	19/2.14	16.2	820
10337	95	1.6	19/2.52	18.1	1090
10005	120	1.6	37/2.03	19.8	1350
10003	150	1.8	37/2.25	21.9	1650
10339	185	2	37/2.52	24.3	2050
10346	240	2.2	61/2.25	27.5	2670

The information in this datasheet is for guidance only and subject to change without liability. Images provided are representations; actual cable dimensions may vary due to manufacturing tolerances.

www.battcables.com | 01322 441165

©2024 Batt Cables Limited

