

LOCKNUTS


CMP locknuts used in securing cable glands and components to a gland plate/enclosure or into equipment.

Available materials:

- Brass
- Nickel Plated Brass
- Aluminium (upon request)
- Stainless Steel (upon request)
- Galvanised Steel (upon request)

SPECIFICATION DATA

Brass		Nickel Plated Brass		Thread Diameter (mm)	Nominal Thickness	Across Flats Dimension (mm)	Across Corners Diameter (mm)
Batt Part No.	CMP Reference	Batt Part No.	CMP Reference	"A"	(mm)	"B"	"C"
88200	16LN	84512	16LN5	M16 x 1.5	3.2	22.0	25.4
88201	20LN	84194	20LN5	M20 x 1.5	3.2	24.0	27.7
88202	25LN	84198	25LN5	M25 x 1.5	3.2	30.0	34.6
82203	32LN	84216	32LN5	M32 x 1.5	3.2	36.0	41.6
88204	40LN	84217	40LN5	M40 x 1.5	4.8	46.0	53.1
82205	50LN	84218	50LN5	M50 x 1.5	6.3	55.0	63.5
88206	63LN	84550	63LN5	M63 x 1.5	6.3	70.0	80.8
88124	75LN	-	75LN5	M75 x 1.5	6.3	84.0	97.0
88124	90LN	-	90LN5	M90 x 2.0	9.5	106.0	122.4

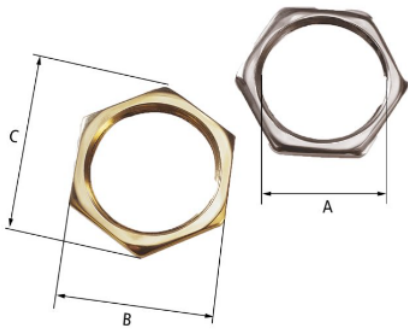

The information in this datasheet is for guidance only and subject to change without liability. Images provided are representations; actual cable dimensions may vary due to manufacturing tolerances.

sales@battcables.com | www.batt.co.uk | 01322 441165

©2024 Batt Cables Limited

